

Overview

Quick Details

Place of Origin:

Guangdong, China

Warranty:

1 Year

Special Features:

Human Motion Tracking, NIGHT VISION, Waterproof / Weatherproof, Built-in Siren, PAN-TILT, Two-way Audio, Low Power

Sensor:

CMOS

Style:

Dome Camera, solar camera, PTZ camera

Function:

Two-way Audio, PAN-TILT, Alarm I/O, NIGHT VISION, Built-in Siren

Video Compression Format:

H. 265

Data Storage Options:

Cloud, SD Card

Application:

Outdoor

Customized support:

Online technical support, Customized logo, OEM, ODM

Packaging & Delivery

Selling Units:

Single item

Single package size:

73X78X16.5 cm

Single gross weight:

18.000 kg

Lead Time:

Quantity(pieces) 1 - 100 >100

Est. Time(days) 10 To be negotiated

1080P 4G CCTV camara de vigilancia 40W solar powered Battery surveillance wifi outdoor camera

Note:

1.the solar panel is the core part of the solar power system, and it is also the most valuable

part of the solar power system. The solar panel absorbs solar light to generate power and transmits power to the battery. The quality and cost of solar panels will directly determine the quality and the cost of the entire system

2. another core part is the battery. the function of the battery power bank is to store the direct current generated by the solar cell for the load. In the photovoltaic power generation system, the solar cell charges the battery during the day, while the solar cell also supplies electricity to the load, and all the load electricity is supplied by the battery at night.


Selling Point 1

Solar panels with high efficiency and high conversion.



Selling Point 2


Under same watt of solar panel, our solar panel size is bigger than others.

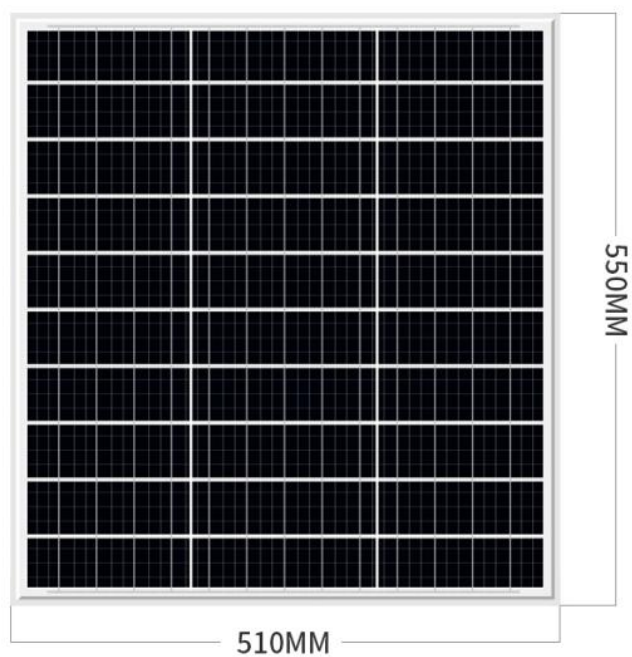

Solar panel size:	550mmx510mmx30mm
Maximum power(W):	40
Tolerance(%) :	+5%
Open circuit voltage(V):	21.8
Working voltage(V):	18.2
Working current(A):	2.19
Short circuit current(A):	2.62
Cell efficiency(%):	17.5

Series fuse rating(A)	5
Terminal Box	IP63
Maximum system voltage(A)	DC1000
Operating temperature (°C)	-40°C---85°C
Weight(KG)	5.7KG

Selling point 3
LifePO4 battery

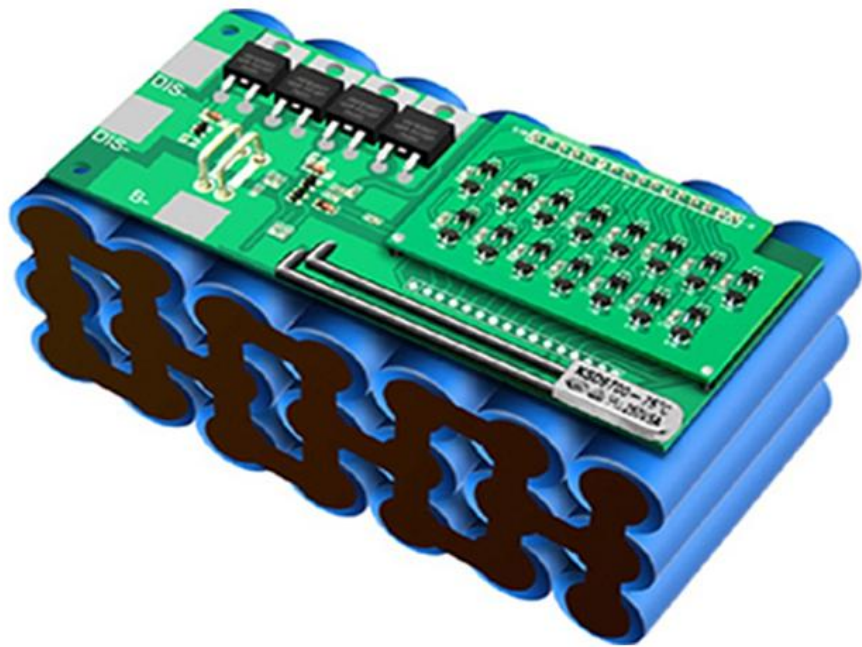

32700 Life PO4 battery

battery cell	3.2V 6000mA
combination method	4S7P
rating capacity(AH)	40AH
battery voltage(V)	12.8V
maximum continous discharge current(A)	10A

charge mode	constant voltage and current
charge current	5A
working voltage range	10.7-14.6V
overcharge protection voltage	14.6V
overdischarge protection voltage	10.7V
cycle lifetime	1000times
working temperature(CC/CV)	charge:0°C-45°C
working temperature(CC/CV)	working:-10°C-60°C
size:(mm)	245mmx140mmx75mm
cable:	2pcs connection cables

Selling Point 4

Support PTZ control



Product number		HC863HCS-1080P (4G)
	Resolution	1920*1080
	frame rate	1-30fps
	Minimum illumination	day mode 0.1LUX,night vision mode 0.01LUX
	CMOS function	Supports automatic white balance,automatic gain control,Automatic backlight compensation
	scene	4MM
audio frequency	coding standard	AMR/G711A
	audio input	1 built-in-38dbmicrophone
	Audio output	Built-in speaker(8Ω1W)
TF card	Data Storage Options	maximum support 128G
Video management	video	Timed video,Alarm video
network	Network Interface	10Mbps-100Mbps Automatic adaptation/RJ45 interface
	Network protocol	TCP/IP, HTTP, UDP, SMTP, DHCP, DNS, P2P Wait
	network	European version
Call the police	Alarm method	Motion Detection
	Alarm Output	APP push
other	Power Specifications	DC12V1A
	Operating temperature	below zero 10-50℃
	Operating temperature	≤80%RH
	Power consumption	1.1W during the day, about 1.3W for infrared startup at night
	waterproof level	IP66

Selling Point 5

Two way installation: wall mounted or hold pole



INSTALLATION OF HOLDING POLE

POLE DIAMETER:76MM




SOLAR SUPPORT CAN BE ERECTED



Selling Point 6

Mobile app remote viewing

Voice intercom, remote video playback, 24-hour real-time monitoring

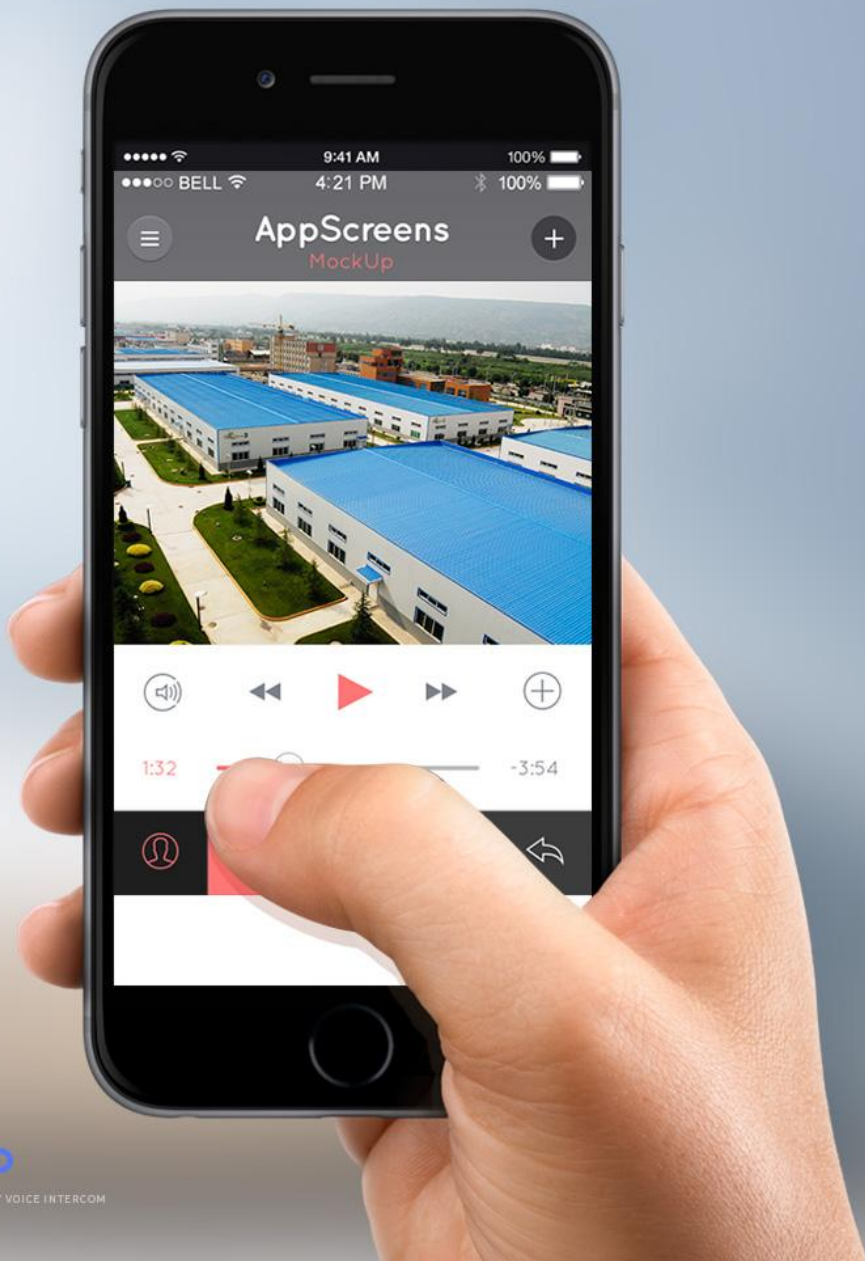

TWO WAY VOICE INTERCOM

Selling Point 7

Sound and light warning, phone receive a push message

when a moving object enter the monitorig area, the camera will automatic start the white light and send a voice warning to shock someone invades, at the same time the camera will send the alarm information to your mobile phone.



**2.5 inch ultra small dome, Outdoor waterproof, Remote control, Support 4G,
TF card storage**

Product features

- ² 2.5 inch Mini housing, outdoor waterproof IP66 level.It is fashionable, beautiful and exquisite.
- ² It uses 2.7mm-13.5mm electrincial vari-focal lens lens +IR-CUT to switch automatically day and night.
- ² 6 high-power Taiwan crystal infrared lamps, 2white lights, infrared distance up to 40 meters, white light distance up to 20 meters;
- ² Rotate 0°-355 °horizontally and rotate 0°-90 °vertically;
- ² Support two-way audio (built-in pickup, loudspeaker.) 、 Wirless WIFI、 TF storage card (maximum to support 128G) ;
- ² Support ONVIF protocol,it is compatible with hikvision and other mainstream brand recoders;
- ² CPU MDM9207, CAT4, DL 150Mbps, UL 50Mbps
- ² TDD-LTE 3GPP,3GPP2 Release10, Category 4,up to 150M DL and 50Mbps UL
- ² FDD-LTE 3GPP,3GPP2 Release10, Category4,up to 150M DL and 50Mbps UL
- ² DC-HSPA+ 3GPP,3GPP2 Release8, up to 21Mbps ,category 24, 5.76Mbps UL
- ² HSPA+ 3GPP,3GPP2 Release7, up to 14.4Mbps ,category 10, 5.76Mbps UL
- ² HSPA 3GPP,3GPP2 Release6, up to 7.2Mbps DL,category 7,8, 5.76Mbps UL
- ² UMTS 3GPP Release4, up to 384 Kbps DL and UL

² EDGE 3GPP Release4, Multislot class 12, up to 237 Kbps

² GPRS 3GPP Release4, Multislot class 10, up to 85.6Kbps